

# SPECIFICATIONS

Engine	R24i4-TC	4J24-TC
Displacement (cm³)	1,890	2,999
Bore x Stroke (mm)	80 x 94.4	95.4 x 104.9
Max Power kW(hp)/rpm*	110kW (150hp) / 3,600	160kW (218hp) / 3,600
Min Torque Nm(kg/m)/rpm*	30mm dia / 1,800-2,000	40.9mm dia / 1,800-2,000
Fuel system	*In-line, 4-cylinder, Common-rail engine, Electronic controlled fuel injection pump with intercooler and turbo charger	
Fuel Tank capacity (litre)	58.7litre	
Transmission	MV4-AT	MV4-5
Gear Ratio	1st 2nd 3rd 4th 5th	3.00 2.42 1.48 1.00 0.87
Suspension	Independent, double wishbone, coil springs with stabiliser bar and gas shock absorber Rear: 4-rod spring with gas shock absorber	
Brake	Front: Ventral disc with 4-pot calipers Rear: Leading and trailing drums	
Weight	ZWD & ZWD High-ride	2,783
Gross vehicle weight (kg)	AWD	2,833
Gross axle weight (kg)	Front Rear	1,238 1,433
Wheel	ZWD High-ride & AWD	17x
Final Gear	ZWD & AWD	3.73

Exterior	RBC	RBD
Front bumper	Body colour	Body colour
Rear bumper	Body colour	Body colour
Side view mirror	Body colour	Chrome
Door handle	Titanium silver colour	Chrome plating
Tail gate handle	Titanium silver colour	Chrome plating
Tires & Wheels		
ZWD	RBC 215/70R15	RBD 15" X6.5J-Steel
Crew	RBC 215/70R15	RBD 15" X6.5J-Steel
ZWD High-ride	RBC 255/65R17	RBD 18" X7.5J-Aluminum in silver
AWD	RBC 255/65R17	RBD 18" X7.5J-Aluminum in silver
Minimum turning circle (m)	ZWD 265/65R18	RBD 265/65R18
*Curb to curb	ZWD High-ride & AWD	12.3

# المواصفات


4J24-TC	R24i4-TC
2,999	1,898
95.4 x 104.9	80 x 94.4
160kW (218hp) / 3,600	110kW (150hp) / 3,600
40.9mm dia / 1,800-2,000	30mm dia / 1,800-2,000
*In-line, 4-cylinder, Common-rail engine, Electronic controlled fuel injection pump with intercooler and turbo charger	
58.7litre	
MV4-5	MV4-AT
3.00 2.42 1.48 1.00 0.87	3.00 2.42 1.48 1.00 0.87
Independent, double wishbone, coil springs with stabiliser bar and gas shock absorber Rear: 4-rod spring with gas shock absorber	
Front: Ventral disc with 4-pot calipers Rear: Leading and trailing drums	
ZWD & ZWD High-ride 2,783	
AWD 2,833	
Front 1,238	
Rear 1,433	
ZWD High-ride & AWD 17x	
ZWD & AWD 3.73	

RBD	RBC
Body colour	Body colour
Body colour	Body colour
Body colour	Body colour
Chrome	Chrome
Chrome plating	Chrome plating
Chrome plating	Chrome plating
15" X6.5J-Steel	15" X6.5J-Steel
15" X6.5J-Steel	15" X6.5J-Steel
18" X7.5J-Aluminum in silver	18" X7.5J-Aluminum in silver
18" X7.5J-Aluminum in silver	18" X7.5J-Aluminum in silver
265/65R18	265/65R18
265/65R18	265/65R18
12.2	12.3


# MODEL LINE UP AND DIMENSIONS

# تشكيلة الموديلات وأبعادها


Crew Cab 4WD - RBD  
سيارة دفع رباعي بمقصورة مزدوجة - آر بي دي




Crew Cab 2WD High-ride & 4WD - RBC  
سيارة دفع ثنائي بمقصورة مزدوجة - آر بي سي



Crew Cab 2WD - RBC  
سيارة دفع ثنائي بمقصورة مزدوجة - آر بي سي



Regular Cab 2WD - RBC  
سيارة دفع ثنائي بمقصورة مفردة - آر بي سي



\* At Floor = 1,571 mm.

# COLOURS الألوان



ISUZU MOTORS INTERNATIONAL OPERATIONS (THAILAND) CO., LTD. reserves the right to change specifications and equipment without notice. Details of specifications and equipment mentioned or shown in this specification sheet are also subject to change in order to meet local conditions and government requirements. Features and specifications may vary in appearance and/or availability according to region.

ISUZU MOTORS INTERNATIONAL OPERATIONS (THAILAND) CO., LTD. يحفظ لنفسه الحق في تغيير المواصفات والمعدات دون إشعار مسبق. تفاصيل المواصفات والمعدات المذكورة أو المعروضة في هذا الجدول هي أيضا عرضة للتغيير من أجل تلبية الظروف المحلية. المواصفات والمعدات المذكورة في هذا الجدول هي عرضة للتغيير من أجل تلبية الظروف المحلية. المواصفات والمعدات المذكورة في هذا الجدول هي عرضة للتغيير من أجل تلبية الظروف المحلية.

ISUZU ISUZU MOTORS INTERNATIONAL OPERATIONS (THAILAND) CO., LTD. 1610 Shinawatra Tower III, 24th-25th Floor, Vibhavadi Rangsit Road, Chatsuchak, Bangkok 10900, THAILAND

\*ISO NET

\*أيزو نت

## COLOURS



Galena Gray

رمادي رصاصي



Titanium Silver

تيتانيوم فضي



Obsidian Grey

رمادي حجري



Sapphire Blue

أزرق بحري



Splash White

أبيض رذاذي



Red Spinel

أحمر ليمع



Cosmic Black

أسود داكن

تحتفظ ISUZU MOTORS INTERNATIONAL OPERATIONS (THAILAND) CO., LTD. بحق تغيير المواصفات بالتغييرات دون أو اقل التغييرات التي يمكن ان تكون متوفرة في السوق المحلية. المواصفات المتغيرة قد تختلف عن المواصفات وايضا قد يختلف وزنها عن المواصفات المتغيرة في السوق المحلية. المواصفات التي هي متغيرة عن المواصفات المتغيرة في السوق المحلية. المواصفات التي هي متغيرة عن المواصفات المتغيرة في السوق المحلية.

ISUZU MOTORS INTERNATIONAL OPERATIONS (THAILAND) CO., LTD. reserves the right to change specifications and equipment without notice. Details of specifications and equipment (standard or shown in this specification sheet) are also subject to change in order to meet local conditions and government requirements. Options and specifications may vary in appearance and/or availability according to region.  
Please inquire your local ISUZU distributor or dealer for more complete details on available models and their specifications.


## الألوان

## MODEL LINE UP AND DIMENSIONS

## تشكيلة الموديلات وأبعادها


Crew Cab 4WD - RBA

سيارة دفع رباعي بمقصورة مزدوجة - آر بي آيه

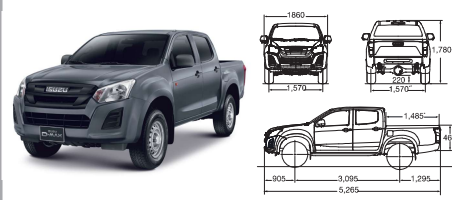


Regular Cab 4WD - RBA

سيارة دفع رباعي بمقصورة مفردة - آر بي آيه

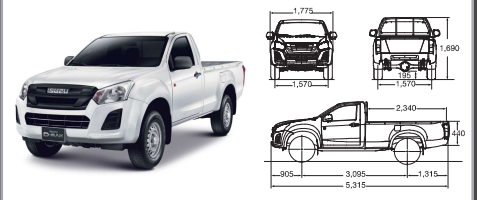


Crew Cab 2WD - RBA

سيارة دفع ثنائي بمقصورة مزدوجة - آر بي آيه

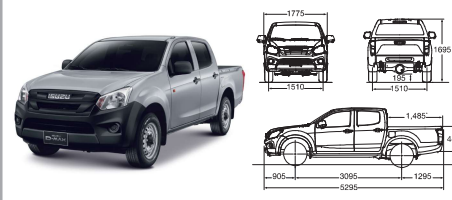

Regular Cab 2WD - RBA

سيارة دفع ثنائي بمقصورة مفردة - آر بي آيه

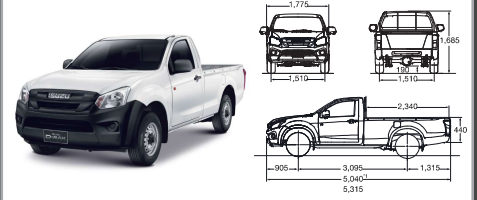

\*At Floor = 1,852 mm.

\*1: CAB-CHASSIS

\*2: With rear cargo with outer hook

\* عند الأرضية = 1,852 ملم \*1: مقصورة بمحرك مفرد \*2: مع صندوق مصولة خلفي بخلفها خارجي



ISUZU MOTORS INTERNATIONAL OPERATIONS (THAILAND) CO., LTD.  
1010 Shinawatra Tower III, 24th-25th Floor, Vibhavadi Rangsit Road, Chatchak, Bangkok 10900, THAILAND

# FEATURES

SPECIFICATION	DRIVE		2WD		4WD	
	CAB TYPE		Regular Cab	Crew Cab	Regular Cab	Crew Cab
	GRADE	RBA	RBA	RBA	RBA	RBA
Engine	4JK1-TC STD	*	*	-	-	-
Transmission	5-speed manual	*	*	*	*	*
MULTI-reflector headlamps	Multi-reflector	*	*	*	*	*
Rear fog lamp		*	*	*	*	*
Center high mount stop lamp		o	o	o	o	o
Cab chassis	o	-	-	-	-	-
Cargo box	*	*	*	*	*	*
Cargo box with outer hook	*	*	*	*	*	*
Flat dock	o	-	-	-	-	-
Guard frame	o	*	*	*	*	*
Urethane steering wheel	*	*	*	*	*	*
Air-conditioning	*	*	*	*	*	*
Seat material	Vinyl Cloth base	o	o	o	o	o
Front bench seat		*	*	*	*	*
Rear seat	56.68" split and folding	-	-	-	-	-
4WD Switch control		-	-	*	*	*
Under body protector	Skid plate Aero cover Oil pan guard Transfer protector	-	-	-	-	-
Dual front airbags	*	*	*	*	*	*
Front seat belt with pretensioner	*	*	*	*	*	*
Brake Override System (BOS)	*	*	*	*	*	*
XBS with EBD and SA	*	*	*	*	*	*
Electronic Stability Control (ESC)	*	*	*	*	*	*
Traction Control System (TCS)	*	*	*	*	*	*
Hill Start Assist (HSA)	*	*	*	*	*	*
Hill Descent Control (HDC)	*	*	*	*	*	*
Tire Pressure Monitoring (TPMS)	*	*	*	*	*	*
Rear defogger	-	-	-	-	-	-

○ Open ● Standard

# الخصائص

نوع الدفع	دفع أمامي		دفع خلفي		نوع المقصورة
	مزدوجة	مزدوجة	مزدوجة	مزدوجة	
	أربعية	أربعية	أربعية	أربعية	
الموتورات	*	*	*	*	4JK1-TC STD
نوع المحرك	*	*	*	*	4JK1-TC HI
نوع التروس	*	*	*	*	5-speed manual
التصميم الخارجي	*	*	*	*	Multi-reflector headlamps
التصميم الداخلي	*	*	*	*	Urethane steering wheel
إطار الحماية	*	*	*	*	Guard frame
التصميم الداخلي	*	*	*	*	Air-conditioning
التصميم الداخلي	*	*	*	*	Seat material
التصميم الداخلي	*	*	*	*	Front bench seat
التصميم الداخلي	*	*	*	*	Rear seat
التصميم الداخلي	*	*	*	*	4WD Switch control
التصميم الداخلي	*	*	*	*	Under body protector
إضاءة الأمان	*	*	*	*	Dual front airbags
إضاءة الأمان	*	*	*	*	Front seat belt with pretensioner
إضاءة الأمان	*	*	*	*	Brake Override System (BOS)
إضاءة الأمان	*	*	*	*	XBS with EBD and SA
إضاءة الأمان	*	*	*	*	Electronic Stability Control (ESC)
إضاءة الأمان	*	*	*	*	Traction Control System (TCS)
إضاءة الأمان	*	*	*	*	Hill Start Assist (HSA)
إضاءة الأمان	*	*	*	*	Hill Descent Control (HDC)
إضاءة الأمان	*	*	*	*	Tire Pressure Monitoring (TPMS)
إضاءة الأمان	*	*	*	*	Rear defogger

○ Open ● Standard

# SPECIFICATIONS

	4JK1-TC STD	4JK1-TC HI
Engine	2,499	2,499
Displacement (cm³)	95.4 x 87.4	95.4 x 87.4
Bore x Stroke (mm)	88.0 x 106.0	88.0 x 106.0
Max Power kW(rpm)*	20.9kW (2000-2200 rpm)	20.9kW (2000-2200 rpm)
Max Torque Nm(kg/m)*	20.9kW (2000-2200 rpm)	20.9kW (2000-2200 rpm)
Fuel system	Injection Pump with Preheater and Intake-charger	Injection Pump with Preheater and Intake-charger
Fuel Tank capacity (litre)	75 litre	75 litre
Transmission	5-speed manual	5-speed manual
Gear Ratio	1st 4.08 2nd 2.91 3rd 2.47 4th 2.00 5th 1.74	1st 4.08 2nd 2.91 3rd 2.47 4th 2.00 5th 1.74
Reverse	1.61	1.61
Final Gear	9.8	9.8
Suspension	Front: Independent, double wishbone, coil spring with stabilizer bar and gas shock absorber Rear: coil spring with gas shock absorber	Front: Independent, double wishbone, coil spring with stabilizer bar and gas shock absorber Rear: coil spring with gas shock absorber
Brake	Front: Ventilated disc with 2-piston calipers Rear: Leading and trailing drums	Front: Ventilated disc with 2-piston calipers Rear: Leading and trailing drums
Weight	2WD 2,750 4WD 2,840	2WD 2,750 4WD 2,840
Gross vehicle weight (kg)	2,750	2,840
Gross axle weight (kg)	Front 2WD 1,375 Rear 2WD 1,375 4WD 1,375	Front 2WD 1,375 Rear 2WD 1,375 4WD 1,375
Exterior	RBA	RBA
Front bumper	Material Black	Material Black
Rear bumper	Material Black	Material Black
Side view mirror	Material Black	Material Black
Door/handle	Material Black	Material Black
Tail gate handle	Material Black	Material Black
Tires & Wheels	Tires	Wheels
2WD	Reg RBA 195R14C Crew RBA 195R14C	15" x 6.5J-Steel 15" x 6.5J-Steel
4WD	Reg RBA 205R14C Crew RBA 205R14C	16" x 6.5J-Steel 16" x 6.5J-Steel
Minimum turning circle (m)	2WD 12.0 4WD 12.6	2WD 12.0 4WD 12.6

\*ISO NET

# المواصفات

المحرك	4JK1-TC HI	4JK1-TC STD
المحرك (سم³)	2,499	2,499
المحرك (بore x Stroke (mm))	95.4 x 87.4	95.4 x 87.4
المحرك (Max Power kW(rpm)*)	20.9kW (2000-2200 rpm)	20.9kW (2000-2200 rpm)
المحرك (Max Torque Nm(kg/m)*)	20.9kW (2000-2200 rpm)	20.9kW (2000-2200 rpm)
المحرك (Fuel system)	Injection Pump with Preheater and Intake-charger	Injection Pump with Preheater and Intake-charger
المحرك (Fuel Tank capacity (litre))	75 litre	75 litre
المحرك (Transmission)	5-speed manual	5-speed manual
المحرك (Gear Ratio)	1st 4.08 2nd 2.91 3rd 2.47 4th 2.00 5th 1.74	1st 4.08 2nd 2.91 3rd 2.47 4th 2.00 5th 1.74
المحرك (Reverse)	1.61	1.61
المحرك (Final Gear)	9.8	9.8
المحرك (Suspension)	Front: Independent, double wishbone, coil spring with stabilizer bar and gas shock absorber Rear: coil spring with gas shock absorber	Front: Independent, double wishbone, coil spring with stabilizer bar and gas shock absorber Rear: coil spring with gas shock absorber
المحرك (Brake)	Front: Ventilated disc with 2-piston calipers Rear: Leading and trailing drums	Front: Ventilated disc with 2-piston calipers Rear: Leading and trailing drums
المحرك (Weight)	2WD 2,750 4WD 2,840	2WD 2,750 4WD 2,840
المحرك (Gross vehicle weight (kg))	2,750	2,840
المحرك (Gross axle weight (kg))	Front 2WD 1,375 Rear 2WD 1,375 4WD 1,375	Front 2WD 1,375 Rear 2WD 1,375 4WD 1,375
المحرك (Exterior)	RBA	RBA
المحرك (Front bumper)	Material Black	Material Black
المحرك (Rear bumper)	Material Black	Material Black
المحرك (Side view mirror)	Material Black	Material Black
المحرك (Door/handle)	Material Black	Material Black
المحرك (Tail gate handle)	Material Black	Material Black
المحرك (Tires & Wheels)	Tires	Wheels
المحرك (2WD)	Reg RBA 195R14C Crew RBA 195R14C	15" x 6.5J-Steel 15" x 6.5J-Steel
المحرك (4WD)	Reg RBA 205R14C Crew RBA 205R14C	16" x 6.5J-Steel 16" x 6.5J-Steel
المحرك (Minimum turning circle (m))	2WD 12.0 4WD 12.6	2WD 12.0 4WD 12.6

\*ISO NET